


CH11 有感金属箔式复合介质电容器

Inductive Mixed with film and foil capacitor

外形图 Outline Drawing

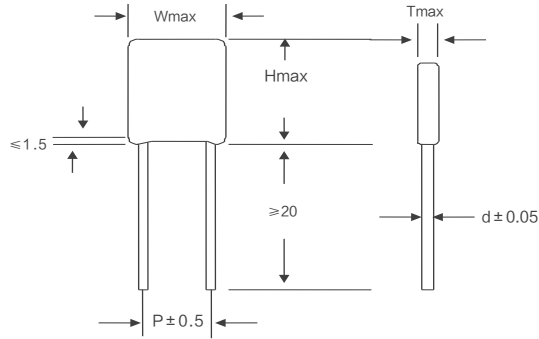

单位 Unit: mm

特点 Features

- 电气性能优良，可靠性高
- 环氧树脂封装
- Better electric property, high reliability
- Epoxy resin coating

主要用途 Typical Applications

- 适用于频率高、耐高温耐压高的节能灯电路中
- Especially suitable for energy-saving lamps with high Voltage and frequency and temperature

技术要求 Specifications

工作温度 Ambient Temperature	-55℃~+105℃
容量偏差 Capacitance Tolerance	J: ±5%; K: ±10%
耐电压 Voltage Proof	2.5U _R
损耗角正切 Dissipation Factor	≤0.005 (20℃, 1kHz)
绝缘电阻 Insulation Resistance	≥5000MΩ (20℃, 100V, 1min)

■ 外形尺寸 Dimensions (mm)

电容量 CAP.	100V				400V				630V			
	W	H	T	P	W	H	T	P	W	H	T	P
822	7.5	13.0	4.5	6.0	10.5	14.0	5.0	7.0	10.5	14.0	5.5	7.0
223	8.0	13.0	5.5	6.0	10.0	15.0	6.5	6.5	11.0	15.0	6.5	7.5
473	9.0	15.0	6.5	7.5	13.0	16.0	7.5	9.0	14.5	16.0	8.5	10.0
683	9.5	15.0	7.0	7.5	13.0	17.0	7.0	9.5	15.5	17.0	9.5	10.0

电容量 CAP.	1000V				1200V				1500V			
	W	H	T	P	W	H	T	P	W	H	T	P
511	6.5	12.0	4.0	4.5	7.5	12.0	4.5	5.0	7.0	12.0	4.5	5.0
681	6.5	12.0	4.2	4.5	7.5	12.0	5.0	5.0	7.0	12.0	5.0	5.0
821	7.0	12.0	4.5	4.5	7.5	12.0	5.0	5.0	7.5	12.0	5.0	5.0
102	7.5	12.0	4.5	5.0	7.5	13.0	4.5	4.0	7.5	13.0	5.0	5.0
122	7.5	12.0	4.5	5.0	7.5	13.0	4.5	4.0	7.5	13.0	5.0	5.0
152	7.5	12.0	4.5	5.0	7.5	13.0	4.5	5.0	7.5	13.0	5.0	5.0
182	7.5	14.0	4.5	5.0	8.0	14.0	5.0	5.0	8.0	14.0	5.5	5.0
222	7.5	14.0	5.0	5.0	8.0	14.0	5.0	5.0	8.0	14.0	5.5	5.0
272	7.5	14.5	5.5	5.0	8.5	14.5	5.5	5.0	8.5	14.5	6.0	5.0
332	8.0	14.5	5.5	5.0	9.5	14.5	5.5	5.0	9.5	14.5	6.0	5.0
392	9.5	14.5	5.5	6.5	10.0	14.5	5.5	5.0	10.0	15.0	6.0	7.5
432	9.5	14.5	6.0	6.5	10.5	15.0	6.5	6.5	10.5	15.0	6.0	7.5
472	9.5	14.5	6.5	6.5	10.5	15.0	6.0	7.5	10.5	15.0	6.0	7.5
562	9.5	14.5	7.0	6.5	11.0	15.0	7.0	7.5	11.0	15.0	7.0	7.5
682	10.0	14.5	7.0	6.5	11.5	15.5	7.5	7.5	11.5	15.5	7.5	7.5
752	10.5	14.5	7.5	6.5	11.5	15.5	7.5	7.5	11.5	15.5	7.5	7.5

注：上表中未包含的产品规格可根据用户要求进行设计和制造

Note: Product specifications not included in this table can be designed and manufactured according to user requirements